



Mike's Transport Warehouse LTD

State Highway 1 North, Hamilton, New Zealand

Phone 64-7-8508333 Fax 64-7-8508200

Po Box:10028 TeRapa

E-Mail:kerry@modtrans.co.nz

Mobile:0274 820028



HV-15000P



FEATURES

- Robust and compact design long life under extreme operating condition
- Smooth running over the entire speed range
- Highly efficient, constant operating torque motor
- High efficiency 2-stage planetary gear train for greater pulling force
- Rotating ring gear clutch is a pull and turn design for rapid wire rope payout
- Spring applied drag brake with one-way clutch
- 10:1 D/d ratio allows for heavy duty application on car transpor, wrecker, tractor, lorry and fire / rescue engine
- **Powered by a PTO / power take off unit driven pump**

SPECIFICATION

Line Pull : 6,803 kg / 15,000 lb

Line Speed : 9 mpm / 28.8 fpm

Operation Pressure : 140 bar / 2,030 psi

Max oil Flow : 15.9 g/min (60 L/min)

Motor Displacement : 156 cm³ / rev (9.5 in³ / rev)

Motor Rotation :.anti-clockwise

Gear Train : 2 stage planetary gears

Gear Ratio : 19.4 : 1

Clutch : Rotating ring gear

Brake : Spring apply drag brake

Drum Size : 127 mm x 255 mm (5" x 10")


- Limited Lifetime Warranty

LINE PULL AND ROPE CAPACITY

Layer of Wire Rope	Line Pull kg/lb	Line Speed at 15.9 g/min (60 L/min) mpm/fpm	Total Rope on the Drum m/ft
1st	6,803 / 15,000	9.0 / 28.8	7.6 / 25
2nd	5,677 / 12,516	10.5 / 34.4	16.8 / 55.1
3rd	4,869 / 10,736	12.3 / 40.4	27 / 89

A 14 mm x 27 m (9/16" x 89') 6 x W (19) + IWRC,
wire rope recommended

DIMENSIONS(mm)

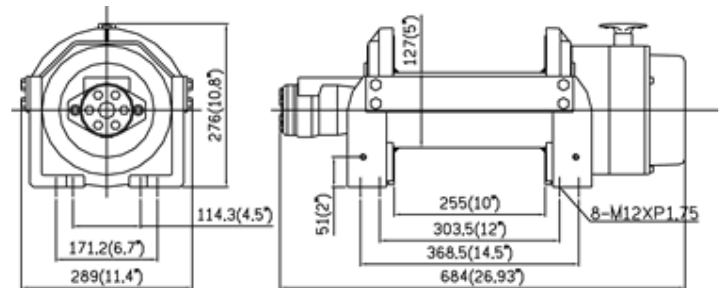

STANDARD ACCESSORIES

- Roller fairlead [WA-0504](#)
- Cable tensioner [WA-0902](#)
- Air Clutch [WA-1001](#)

PACKAGE

- **Winch weight** : 72 kg / 158.7 lb
- **Gross Weight** : 88 kg / 194 lb
- **Box Dimension** : 715 x 415 x 311 mm (28.2" x 16.3" x 12.2")