SUSPENSION HEAVY DUTY RANGE

Weweler. Leadership in suspension technology

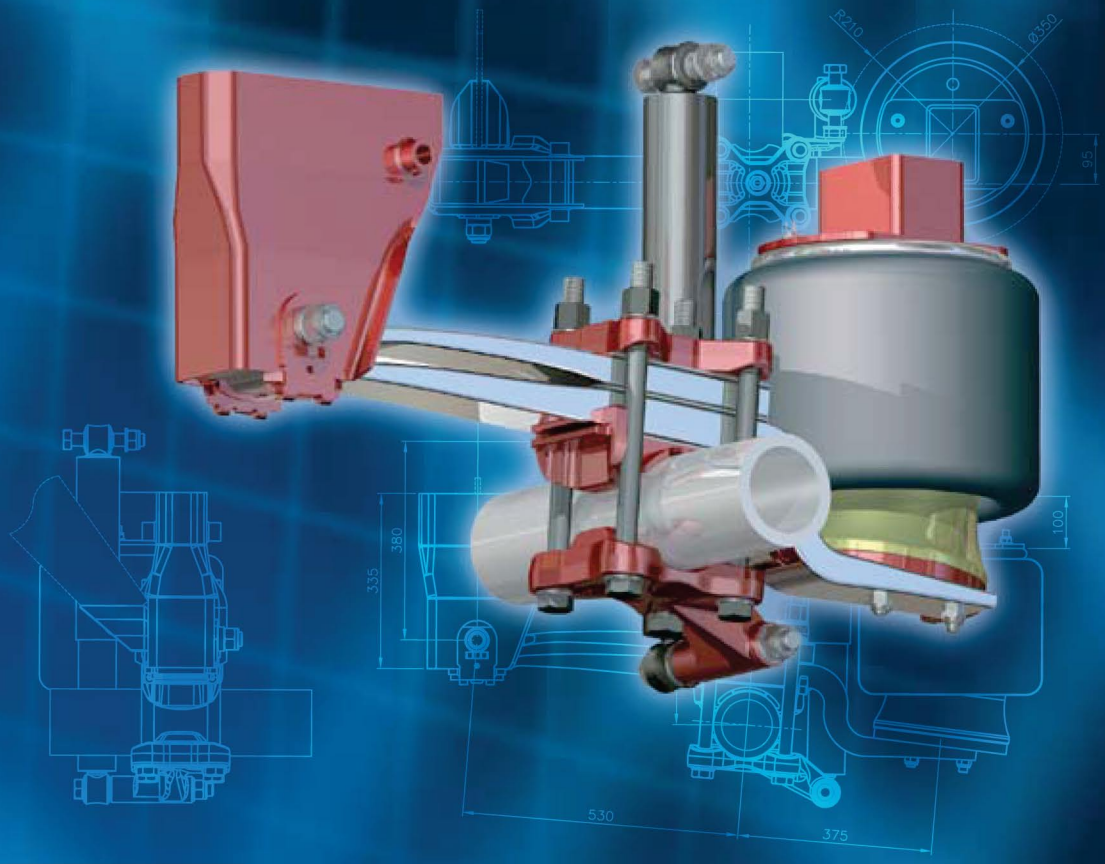

FEATURES

- Maximum Axle Load: 11T.
- Double leaf trailing arm
  1st: 100x35mm
  2nd: 100x45mm
- Available ride heights:
  Underslung systems: 195-350
  Overslung systems: 390-570
- Rear mount shock included
- Parabolic Trailing arm offers controlled vertical deflection due to the elasticity of the spring steel
- Absorbs road shocks and severe oscillations of running gear
- Free of horizontal movement
- Minimum deflection due to specially designed pivot bush
- Easy alignment through hanger plates which are then welded after alignment

Hanger bracing: Cast bracket supplied standard allows easiest and most precise method of supporting and bracing the hanger

- Premium heavy duty shock absorbers supplied to suit front mount configuration as standard or optional rear mount shock system can be supplied

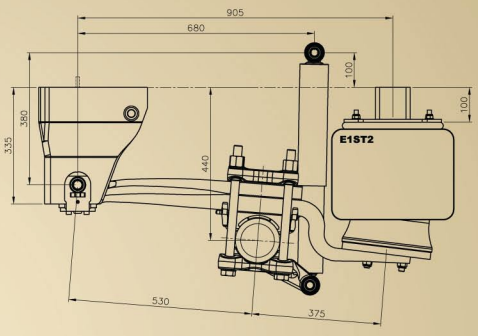

WEWELER®
IMPROVING TRANSPORTATION

MELBOURNE
13-21 Bliss Court
Derrimut VIC 3030
p: 03 9369 0000
f: 03 9369 0100
melb@khitch.com.au

PERTH
10B Bradford Street
Kewdale WA 6105
p: 08 9353 3655
f: 08 9353 6055
perth@khitch.com.au

BRISBANE
2/14 Overlord Place
Acacia Ridge QLD 4110
p: 07 3272 8322
f: 07 3272 8344
qld@khitch.com.au

www.khitch.com.au